





THE DRESSOR GROUP



European
Electric Chain
Hoist



European Electric Chain Hoist With Electric Trolley

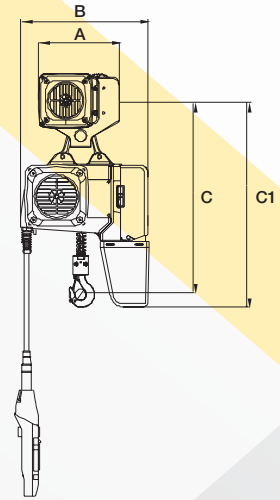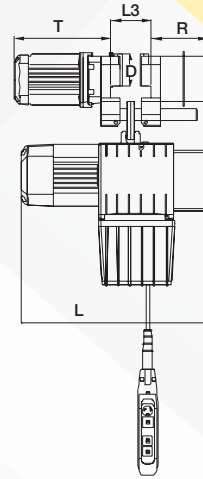


Technical Parameters

Model	[KG]	[M/MIN]	[KW]	[R/MIN]	[V]	[FEM / ISO]
BMS0.125-01M	125	8/2	0.4/0.1	2880/720	24	2M/M5
BMS0.125-01M	125	13/3.2	0.75/0.2	2880/720	24	2M/M5
BMS0.25-01M	250	8/2	0.4/0.1	2880/720	24	2M/M5
BMS0.5-01M	500	8/2	0.75/0.2	2880/720	24	2M/M5
BMS0.5-01M	500	12/3	1.5/0.37	2880/720	24	2M/M5
BMS0.5-02M	500	4/1	0.4/0.1	2880/720	24	2M/M5
BMS01-01M	1000	8/2	1.5/0.37	2880/720	24	2M/M5
BMS01-01M	1000	6/1.5	1.5/0.37	2880/720	24	2M/M5
BMS01-02M	1000	4/1	0.75/0.2	2880/720	24	2M/M5
BMS02-02M	2000	4/1	1.5/0.37	2880/720	24	2M/M5
BMS02-02M	2000	3/0.75	1.5/0.37	2880/720	24	2M/M5

Model	L	T	R	L3	A	B	C	C1
BMS0.125-01M	440	280	175	80-200	210	288	470	470
BMS0.125-01M	464	280	175	80-200	210	315	490	495
BMS0.25-01M	440	280	175	80-200	210	288	470	470
BMS0.5-01M	464	280	175	80-200	210	315	490	495
BMS0.5-01M	548	280	175	80-200	210	315	600	680
BMS0.5-02M	440	280	175	80-200	210	288	540	470
BMS01-01M	548	285	175	80-200	335	343	600	680
BMS01-02M	464	285	175	80-200	335	315	560	495
BMS02-02M	548	285	175	80-200	335	343	670	690





European Electric Chain Hoist With **MANUAL** Trolley

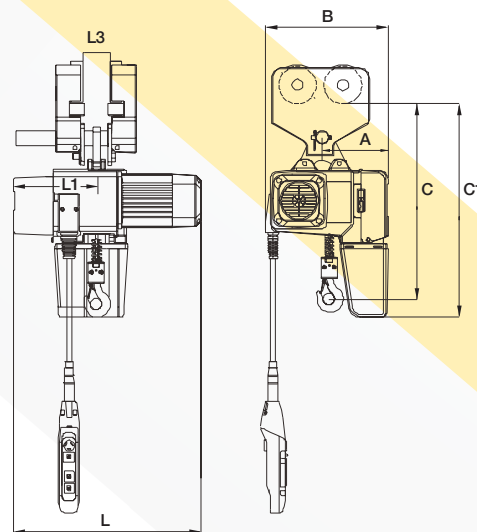



Technical Parameters

Model	[KG]	[M/MIN]	[KW]	[R/MIN]	[V]	[FEM / ISO]
BMS0.125-01M	125	8/2	0.4/0.1	2880/720	24	2M/M5
BMS0.125-01M	125	13/3.2	0.75/0.2	2880/720	24	2M/M5
BMS0.25-01M	250	8/2	0.4/0.1	2880/720	24	2M/M5
BMS0.5-01M	500	8/2	0.75/0.2	2880/720	24	2M/M5
BMS0.5-01M	500	12/3	1.5/0.37	2880/720	24	2M/M5
BMS0.5-02M	500	4/1	0.4/0.1	2880/720	24	2M/M5
BMS01-01M	1000	8/2	1.5/0.37	2880/720	24	2M/M5
BMS01-01M	1000	6/1.5	1.5/0.37	2880/720	24	2M/M5
BMS01-02M	1000	4/1	0.75/0.2	2880/720	24	2M/M5
BMS02-02M	2000	4/1	1.5/0.37	2880/720	24	2M/M5
BMS02-02M	2000	3/0.75	1.5/0.37	2880/720	24	2M/M5

Model	L	L1	L3	A	B	C	C1
BMS0.125-01M	440	194	80-200	160	288	470	470
BMS0.125-01M	464	197	80-200	170	315	490	495
BMS0.25-01M	440	194	80-200	160	288	470	470
BMS0.5-01M	464	197	80-200	170	315	490	495
BMS0.5-01M	548	239	80-200	182	343	600	680
BMS0.5-02M	440	194	80-200	160	288	540	470
BMS01-01M	548	239	80-200	182	343	600	680
BMS01-02M	464	197	80-200	170	315	560	495
BMS02-02M	548	271	80-200	182	343	670	690

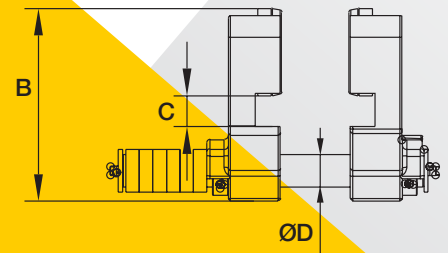

Model	KG	A	B	C	D	I Beam
MT-0.5	500	192	179	29	30	80-200
MT-01	1000	400	291	55	31	80-200
MT-02	2000	400	291	47	36	80-200

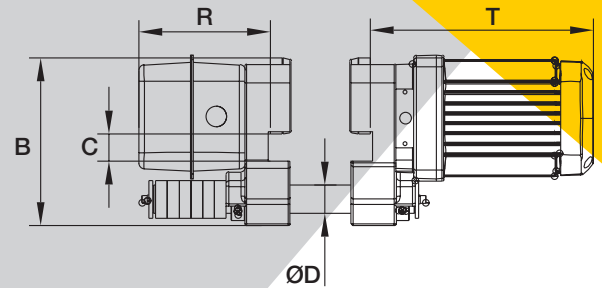

Model	KG	A	B	C	D	T	R	[M/MIN]	[KW]	I Beam
MT-0.5	500	210	179	29	30	280	175	18	04	80-200
MT-01	1000	385	291	55	31	285	175	12	04	80-200
MT-02	2000	385	291	47	36	285	175	20	0.55	80-200



THE DRESSOR GROUP LTD.

400 Morobel Dr. Unit # 3 Milton, Canada ON L9T 4N6

(855) 636-9100 info@thedressorgroup.com